

Specification

Code-Nr.: 60603032L

Photos



Electrical properties

Antenna Type
 Frequency
 Impedance
 Gain
 V.S.W.R
 Return Loss
 Polarization



External Antenna
 690 - 960/1710 - 2170/2400 - 2700 MHz
 50 Ohm
 2,5 - 6 dBi
 2.2:1
 Please see Data-1
 Vertical


Mechanical properties

Touch Type
 Dimensions
 Color
 Operating Temperature Range
 Storage Temperature Rangge
 Cable Length
 Connector

Screw Type
 250mm±2
 White
 -20°C - +60°C
 -30°C - +70°C
 5m LowLoss fire retardant
 SMA male

Diagrams

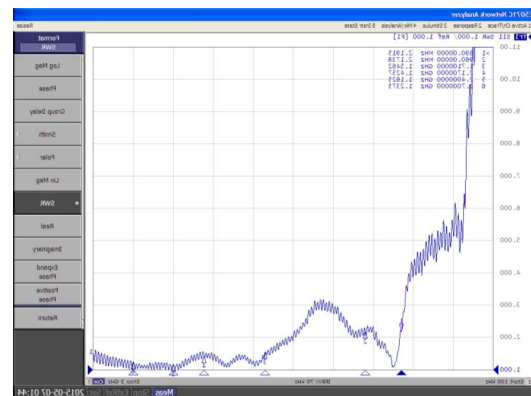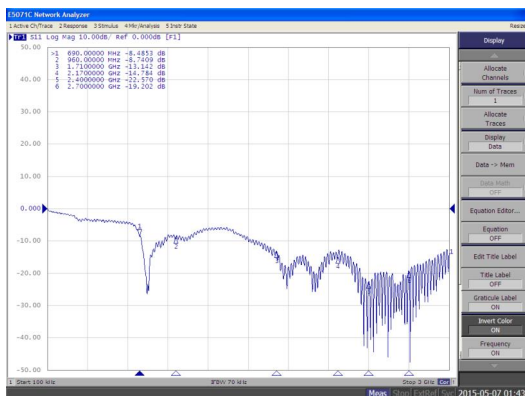

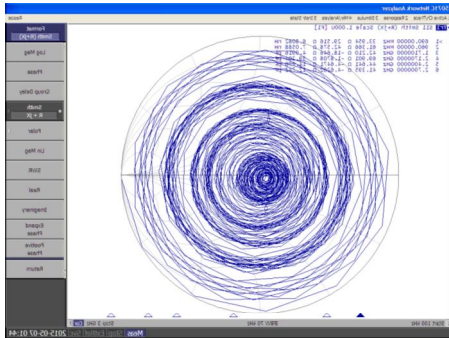

Total Frequency (MHz)	700	824	850	900	960	1710	1880
Directivity (dBi)	2.5469	3.17458	3.47791	4.10112	4.14807	6.12054	5.55701
Efficiency (dB)	-0.0156725	-1.99626	-1.81068	-2.1875	-2.59834	-2.54195	-1.94074
Frequency (MHz)	1990	2170	2400	2500	2600	2700	
Directivity (dBi)	6.1162	3.08404	5.20207	5.9752	6.487	5.84616	
Efficiency (dB)	-0.939072	-2.49955	-0.202901	-0.369118	-0.573828	-0.930033	

